

MP-5123140-LSS

Features:

S

afe

&

R


eliable

Modular design, Parallel using

One key on/off, redundancy protection.

Inverter

Live communication, and compatible with most leading LV inverters.

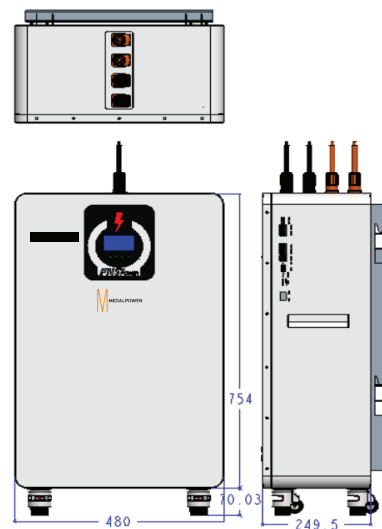

+6000 cycles@80% DOD

MP-5123140-LSS

Battery Module	MP-5123140-LSS
Battery category	LiFePO4
Rated energy (kWh) (25 ℃, 0.5C)	16.076
Rated voltage (V)	51.2
Rated capacity (Ah)	314
Max. charging and discharging current (A)	200
Charging and discharging current (A)	60A (Recommended)
Dimension (W*D*H, mm)	480*754*249.5
Weight (Kg)	126
Operating voltage (V)	43.2V-58.4V
Working temperature	0℃~45℃ , Recommend 15℃~30℃
Communication	CAN/RS485
Degree of protection	IP20

LEAVE POWER FOR MEDAL POWER