

## MP-5122800-LVT

### Features:

This series is a complete solution for the lithium iron phosphate battery system for the home energy storage field. There are three types of wall-mounted, vertical structures and rack. The system is safe and reliable. It can be used in home storage, industrial and commercial energy storage and other fields.



### Product Features



Safe, reliable and long life



Dynamic identification, automatic paralleling, no need for DIP switches



Support Bluetooth, mobile APP switching PCS protocol



Flexible expansion, the number of parallel machines supports up to 15



CAN/RS485/  
LAN interface



Visualization, LCD  
screen display




Supports mixed parallel  
of old and new batteries




Efficient operation  
and maintenance

### Compatible With Inverter Brands


MACQUARIE	Solis	GROWATT	DEYE	VITVON	SERMATEC	LUXPOWER	GSSTES
SMA	GOODWE	SREN	HuiNeng	iYPower	OUKITEL	ROBOROCK	Sunsunk
Voltronic	Pylontech	MustPower	SAKO	Senergy	Felicity	KSTAR	SOROTEC

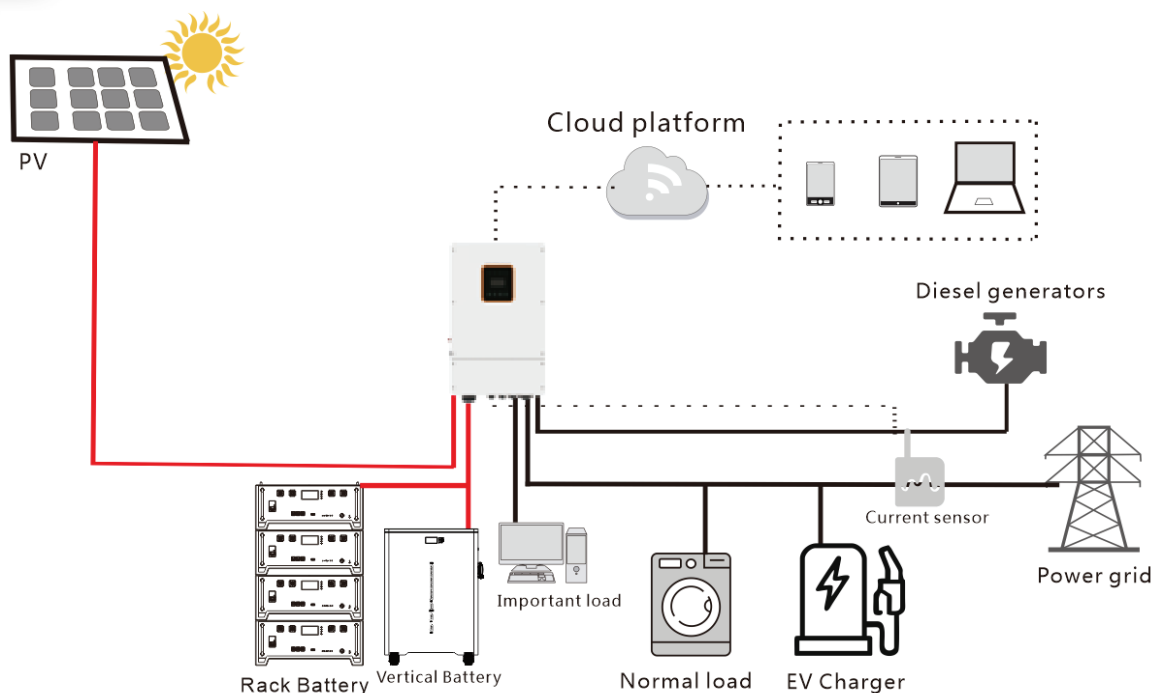

## System Specifications

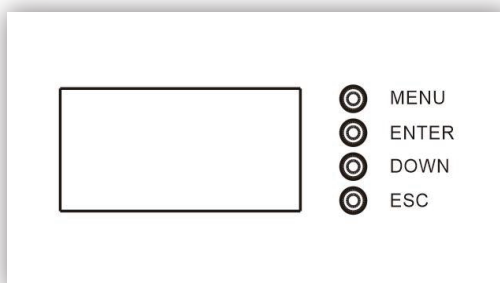

Panel silkscreen preview

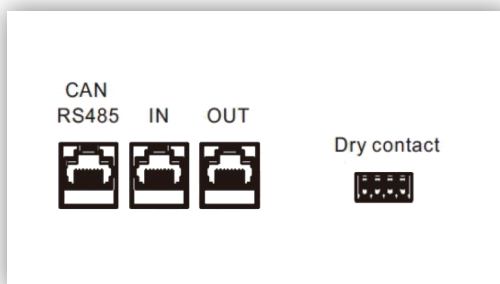

Battery communication interface preview

Model	MP-5122800-LVT
Voltage(V)	43.2~58.4V
Cell	3.2V280Ah
Number of cells	16
Number of parallel machines	15PCS
Nominal voltage(V)	51.2
Nominal Capacity(Ah)	280
Nominal Energy(kWh)	14.33
Maximum power output(kWh)	8.7
Maximum discharge current(A)	170
Maximum charging current(A)	120
Cut-off voltage(V)	40
Maximum charge voltage(V)	58.4
Cycles(25℃, 0.5C, 80%DOD)	≥8000
Charging temperature(℃)	0~55
Discharge temperature(℃)	-20~55
Operating humidity	<95%R.H
Communication mode	CAN/RS485
Dry contact	Customized by demand
Optional modules	Bluetooth
Product size(W*D*H, mm)	760*560*230
Packing size(W*D*H, mm)	885*640*290
Protection class	IP21
System weight(kg)	Approx 120